



# Virtual Environments and their impact on the Network



Christian Renaud  
CISCO

# Agenda

- Which Virtual Environments?
- Platform by Platform Analysis
- Platform Comparison
- Architectural and Topological Considerations
- Recommendations

# Which Virtual Environments?



# There.com/Makena



## ■ Traffic

- Avg packets/sec: 50
- Avg packet size: 280 bytes
- Avg Bytes/Sec: 13020
- Avg traffic: 110kbps

## ■ Network Behavior

- Login via TCP/ TLS- Standard Ports (443)
- UDP is used for client content/texture updates
- For Voice:
  - Uses RTP (no RTCP)
  - ~96byte UDP packets (G.729?)
  - Consistent source/destination based on location in world

# Second Life



## ■ Traffic

	Brian	Stefano
Average Packets/Sec	162	77
Average Packet Size	438 bytes	707 bytes
Average Bytes/Sec	70725	31384
Average Traffic	560kbps	230kbps

*All traffic was heavily dependent on available bandwidth and server load*

## ■ Network Behavior


- Login via SSLv2 and TLS- Standard Ports (443)
- Separate SIP Signaling for voice
- Combination of hosts, TCP and UDP

# Second Life



- SIM / Virtual World
  - Periodic TCP (capabilities?) exchange with the server initiated by the client (50s)
  - Constant upstream UDP flow: 10Kb/s
  - Avg packet size: from 160bytes to 520bytes, more frequently around 300bytes
  - Avg packets/sec: 15 to 150, typical avg: 50
  - Leakage: teleporting from SIM1 to SIM2 then back to SIM1, SIM2 keeps sending UDP pkgs even after logging off from SL
- Voice
  - Starting voice consumes about 200Kb/s, half upstream, for 20s.
  - Avg packet size: 150bytes (little variance)
  - Avg packets/s: 13 to 30
  - Accounts for as much as 40% of the traffic when there is no Virtual World update

# Second Life

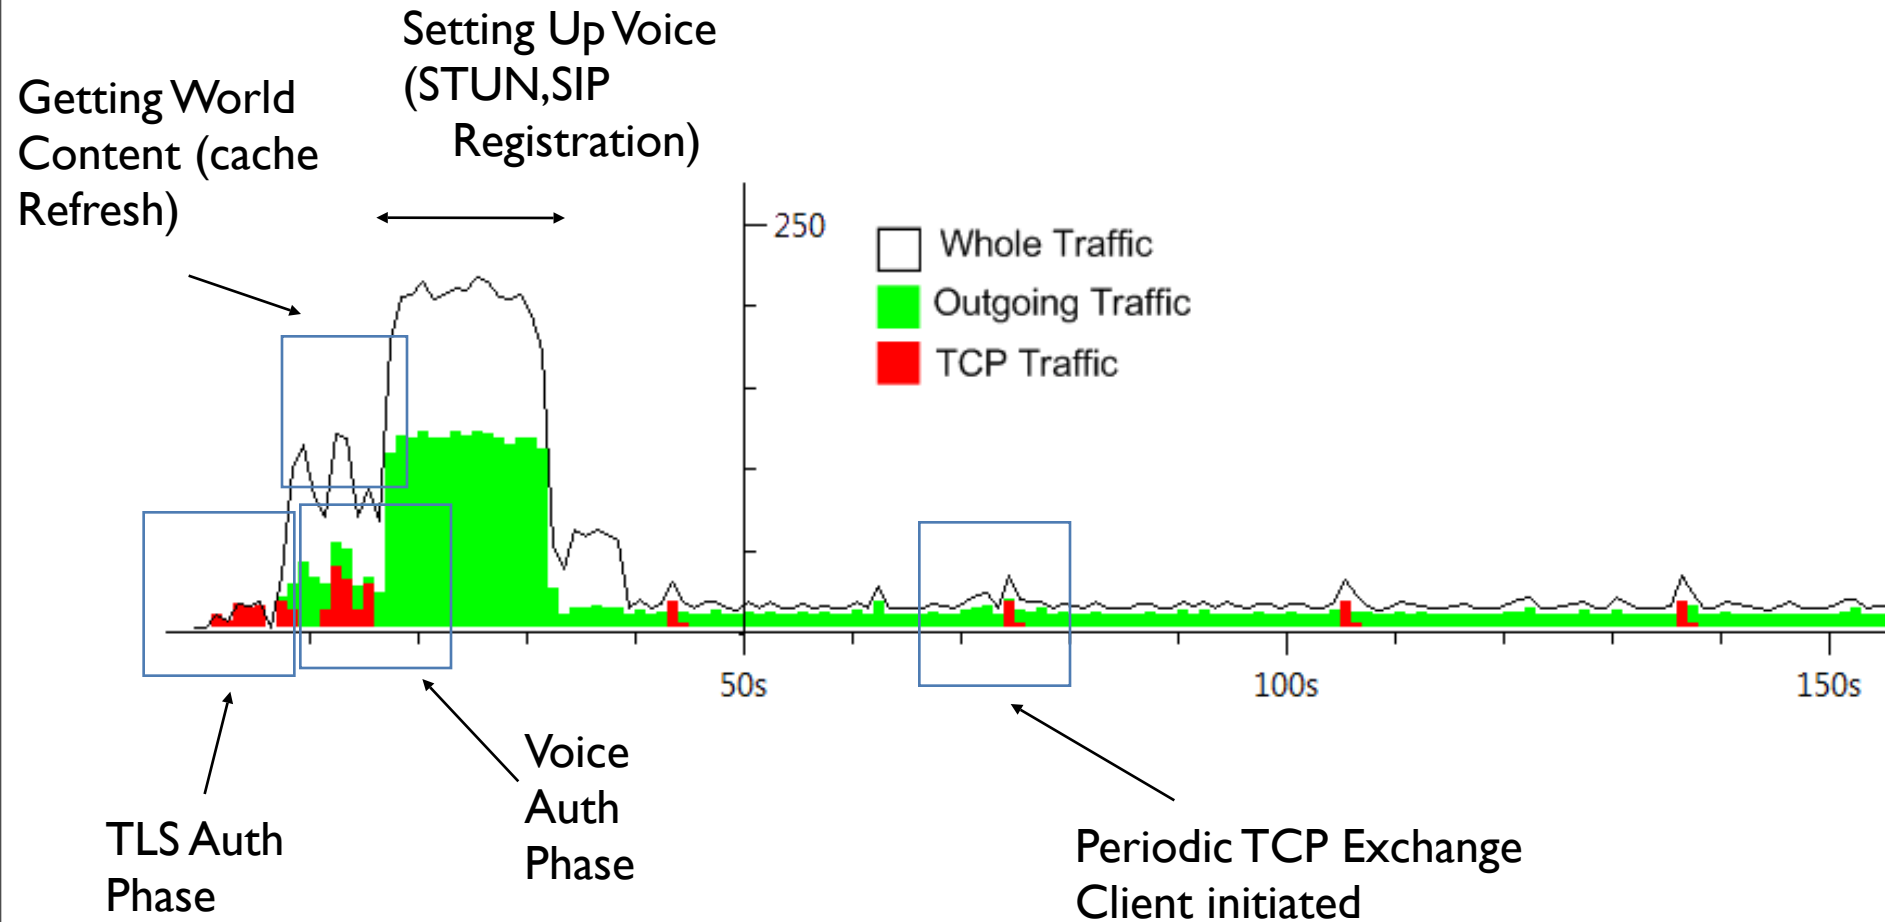

# Second Life



- For Voice:
  - (Vivox bhear) Uses RTP and RTCP
  - 30ms Samples
  - SIREN14-3D codec
  - 50-150 byte UDP packets
- Security and Firewall Considerations
  - For Virtual World: currently requires open incoming UDP packages on a wide range of ports, from non-fixed address set!
  - For Voice:
    - If you are behind a NAT gateway, STUN is used to establish connection and open ports
    - Different server address range (70.42.62.x (www or proxy.bhr.vivox.com)) than standard Linden servers (64.129.40.x, 66.150.244.x, 69.25.204.x)
  - In General:
    - Linden Says “Second Life needs to connect to ports 443/TCP, 12043/TCP, 12035/UDP, 12036/UDP, and 13000-13050/UDP. You should configure your firewall to allow outbound traffic on those ports, and related inbound traffic.”
    - Cisco Says “Don’t!”

# Proton Media/Protosphere



## ■ Traffic

	Intranet	Internet
Average Packets/Sec	19	14
Average Packet Size	186 bytes	172 bytes
Average Bytes/Sec	3564	2525
Average Traffic	29kbps	20kbps

## ■ Network Behavior

- Login via un-encrypted TCP
- Signaling via standard TCP ports

# Proton Media/Protosphere



- Voice:
  - 60 byte RTP (no RTCP)
  - 10ms samples
  - Codec uncertain (most likely G.711, non-spatial)
  - No signaling protocol
- Security and Firewall Considerations
  - Uses standard ports and functions fine within and through corporate firewall.

# Multiverse



## ■ Traffic

- Mainly UDP (94%) and little TCP (~6%)
- Avg packets/sec: 5
- Avg packet size: 230 bytes (quite steady)
- Avg traffic: 1300 Bytes/s (0.01 kbps)

## ■ Network Behavior

- First logs into the main server, sending login/pwd in **plaintext**
- Second log in is again in plaintext, but with no password authentication, and a 'fakeencryptiontoken' plaintext attribute.
- 'DarkHorizon' world is extremely simple, and was empty

# ActiveWorlds










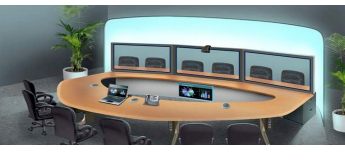
## ■ Traffic

- All traffic is TCP – predominantly HTTP
- Avg packets/sec: 50 (80 when starting with empty cache, 16 with full cache)
- Avg packet size: 650 bytes
- Avg traffic: from 8685 B/s (0.07 kb/s) to 59800 B/s (0.48 kb/s)
- Avg traffic: 110kbps

## ■ Network Behavior

- As with SL, most of the traffic is due to downloading world content. Once the Cache is full, traffic drops considerably
- The content server is a standard HTTP server with files containing textures (and probably other world data)

# Platform Comparison and Contrast

Platform	Bandwidth	Architecture	Security
	<i>Up to 110k per client with voice</i>	Hybrid Client Server	Standard Ports- Possible FW
	<i>Up to 500k per client with voice</i>	Cache Intensive Client Server	Inconsistent- Air/ VLAN Gap
	<i>Up to 130k per client with voice</i>	Pre-Cached Client Server	Standard Ports
	<i>100k per client</i>	Pre-Cached Client Client Server	N/A
	<i>Up to 400k per client, 100k avg</i>	Pre-cached Client Server (HTTP)	Easier to deploy (TCP only)
	<i>~100k per client</i>	Hybrid C/S & P2P	Intranet
	<i>500k per client</i>	Hybrid C/S & P2P	Internet Encrypted
	<i>15 Mbps per location</i>	Hybrid C/S & P2P	Intranet or Extranet

# Architectural and Topological Considerations

- Plan for widespread adoption within an Enterprise
- ‘Screen Paint’ architecture consumes considerable bandwidth per client (a la WebEx). Increasing cache within the client can reduce bandwidth consumption.
- Current virtual world platforms are either Intranet implementations or network-inefficient. Lobby your favorite virtual world provider for better network hygiene.
- Voice in virtual worlds has same latency/jitter requirements as most platform implementations (screen paint).

# Recommendations

1. Separate VLAN or air-gap'd network for Second Life, There.com, Multiverse
  - Network-security-integrity-unfriendly implementations
  - Large potential security exposure
2. Potential solutions
  - Guest/Public WiFi network
  - SOCKS proxy (caveat-Voice)
  - Ad-hoc proxy (and STUN enabled firewalls)
3. Long Term Solution- Better VW software implementations and added support in network devices

